


LPC-P150S-1E Series

15" (1024*768) Bezel-Free P-cap Panel PC, Intel® Celeron® J6412 Processor, IP64 Aluminum Front Bezel, DC 9~36V Wide Power Input

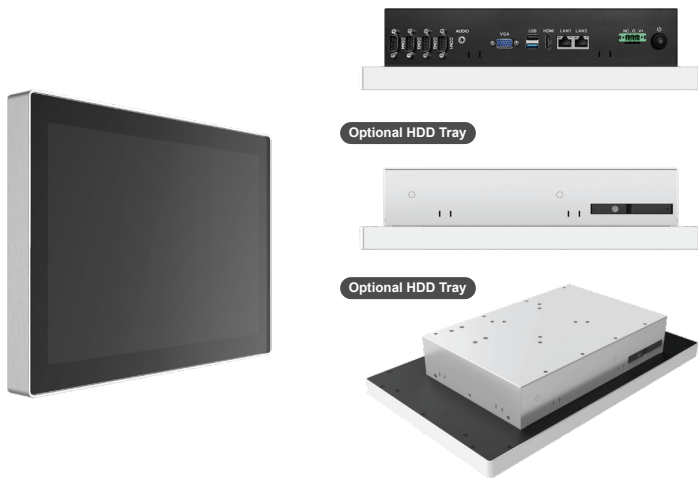

Features

- ▶ Intel® Elkhart Lake SoC J6412 Processor
- ▶ 15" P-cap Flat Bezel
- ▶ 1024*768 Resolution LCD
- ▶ Fanless Design
- ▶ DC 9~36V Wide Range Power Input
- ▶ IP64 Front Panel
- ▶ 3-Pin Power Input Terminal Block
- ▶ -20~60°C Operation Temperature
- ▶ Optional IP65
- ▶ Optional Anti-Glare P-cap
- ▶ Optional HDD Tray

System

Processor	Intel® Celeron® J6412 Processor
System Memory	1 x DDR4 3200 SO-DIMM, up to 32GB
External I/O Port	1 x Display Port 1.4a 1 x HDMI 2.0b 4 x USB 3.0 2 x RJ45 (LAN1: Intel I225-V, LAN2: Intel I211/I210AT) 1 x RS-232/422/485 (COM1) 3 x RS-232(COM2,3,4) 1 x Line-Out 1 x Mic-In 1 x Power press button 1 x 3-Pin Power Input
Storage	1 x M.2 Key M, 2280 with SATA/PCIe x2 signal for SSD
Operating System	Windows 10 IoT Enterprise LTSC Linux (by Request)
Expansion	1 x M.2 (Key B, 2242/2252) with PCIe x1/USB 3.0 and SIM 1 x M.2 (Key E, 2230) with PCIe x1 & USB2.0 for Wireless
Touch	Projected Capacitive by USB

LCD

Display Type	15" TFT LCD
Max. Resolution	1024*768
Contrast Ratio	700:1
Max. Color	16.2M
Luminance	350 nits
View Angle	80/80/70/70


Power Requirement

Power Input	DC 9~36V Wide Range Power Input
-------------	---------------------------------

Environment

Operating Temp	-20~60°C, IEC-60068-2-1/2/14
Storage Temp	-20~60°C
Certification	FCC/CE Class A
Humidity	10~90% @40 °C, non-condensing
EMC	FCC / CE Class A Certification CE Class B Compliant
Vibration	1.5 Grms @10~500Hz, IEC-60068-2-64
Mounting	VESA Mount 75 x 75 / 100 x 100 M4 Screw Hole
Dimension	TBC

* All specifications are subject to change without prior notice.



Ordering Information

LPC-P150S-1E	15" (1024*768) Bezel-Free P-cap Panel PC, Intel® Celeron® J6412 Processor, IP64 Aluminum Front Bezel, DC 9~36V Wide Power Input
LPC-P150SAG-1E	15" (1024*768) Bezel-Free P-cap Panel PC, Intel® Celeron® J6412 Processor, Anti-Glare, IP64 Aluminum Front Bezel, DC 9~36V Wide Power Input

Ordering Code

LPC-P150SAG-1E	-H / -OB / -B / -AG / -AR / -V
H = High Brightness 1000 nits LED backlight	
OB = Optical Bonding	
B = Glass Withtout Touch	
AG = Anti-Glare	
AR = Anti-Reflection	
V = Vandal Proof Glass (By Project)	