


LPC-P240W-2N

24" P-cap Panel PC with Intel® Pentium® Processor N4200, IP65 / 66 Bezel-Free and Wide Range Power Input

Features

- ▶ Intel® Pentium® Processor N4200 , 1.1 GHz, up to 2.5 GHz
- ▶ IP65 / 66 Front Panel
- ▶ Bezel-Free Design
- ▶ 24" P-cap Flat Bezel
- ▶ Fanless Design
- ▶ Marine IEC-60945 certificated
- ▶ DC 9~36V Wide Range Power Input
- ▶ 1920*1080 Resolution
- ▶ 300 nits LED Backlight
- ▶ Optional 1000 nits LED Backlight
- ▶ Lockable HDD Tray
- ▶ Optional to Resistive Touch

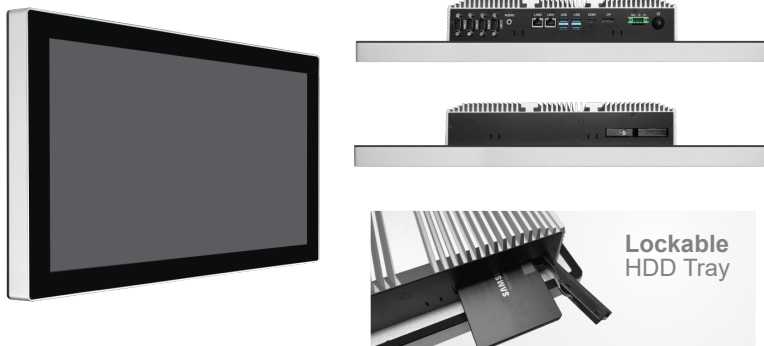

System

Processor	Intel® Pentium® Processor N4200, QC, 6W
System Memory	DDR3L SO-DIMM , up to 8 GB
External I/O Port	4 x USB 3.0
	2 x GbE LAN (Intel® I211-AT GbE LAN)
	1 x Display Port
	1 x HDMI
	3 x RS-232
	1 x RS-232/422/485 (COM1)
	1 x Audio
	1 x Power press button
	1 x 3-Pin Power Input
	1 x Lockable HDD Tray
Storage	1 x SATA3 (6.0Gb/s)
	1 x mSATA (full size mini-PCIe)
Operating System	Windows 10 IoT Enterprise LTSC/SAC 1809 (64-bit, RS5)
Expansion	2 x MiniPCIe Slot

LCD

Display Type	24" TFT LCD
Max. Resolution	1920*1080
Max. Color	16.7M
Luminance	300 nits
View Angle	89/89/89/89
Backlight Lifetime	30,000 hours

Environment

Operating Temp	-30~70 °C , IEC-60068-2-1/2/14
Storage Temp	-30~70 °C
Humidity	10~90% @40 °C, non-condensing
EMC	FCC / CE Class A Certification
	CE Class B Compliant
Vibration	1.5 Grms @10~500Hz, IEC-60068-2-64

Power Requirement

Power Input	3-Pin Power Input Terminal Block
	DC 9~36V Wide Range Power Input


Touch Screen

Type	24" P-cap USB interface
------	-------------------------

Mechanical

Construction	Aluminum Front Bezel and Metal Case
IP Rating	Front Panel IP65 / IP66 Compliant
Mounting	VESA / Panel Mount
Dimension	577.2 x 370.4 x 84

Dimension & I/O Connector

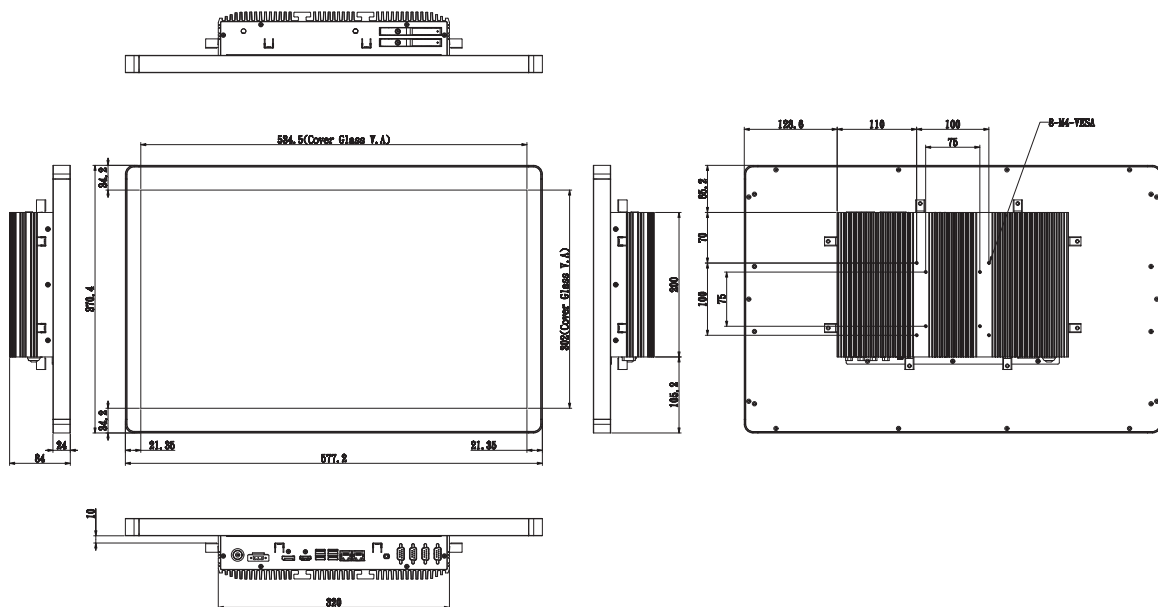

Ordering Information

LPC-P240W-2N	24" P-cap Panel PC, Pentium® Processor N4200, 1920 x 1080 Resolution, 300 nits, DC9~36V Power Input, including a 3-Pin Power Adapter (12V/7.5A)
WFK-024	WiFi kits w/ cable & Antenna (2.4GHz, 802.11 b/g/n, 1T1R)
WFK-524	WiFi kits w/ cable & Antenna (2.4 & 5GHz, 802.11 a/b/g/n/ac + BT, 2T2R)
04-US-26-00002	120 W / 24V power adapter with 3 pin terminal block (For High Brightness Model)

Ordering Code

LPC-P240W-2N	-H / -OB / -G / -AG / -AR / -V
--------------	--------------------------------

H = High Brightness 1000 nits LED backlight

OB = Optical Bonding

G = Glass without touch

AG = Anti-Glare

AR = Anti-Reflection

B = Power Board for Input on board fuse / Input reverse protection / Over current protection / Output short circuit protection

V = Vandal Proof Glass (By Project)