


Model Number **TDM-P215WTHAG-90L**

Title 21.5" P-cap touch Monitor, 1000 nits, AG coating, 8 ms response time (Either Rising or Fall), OSD on the front/ right side, with 3 Pin terminal block adapter

Feature

- 21.5" Aluminum Bezel Free Design
- 21.5" P-cap with 1000 nits LED Backlight
- IP65 Front Bezel
- 1920*1080 Resolution
- DC 9~36V Power Input
- AG Coating
- 1000 nits LED Backlight
- IEC-60945 Marine certificated
- OSD on the front / Right side

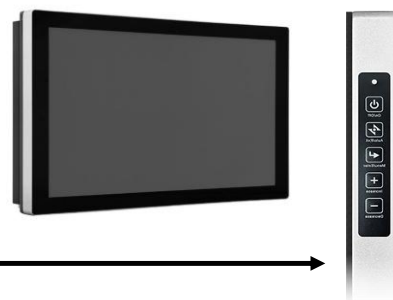

I/O Connect

External I/O Port

- HDMI Port x 1
- DVI Port x 1
- VGA Port x 1
- USB Port x 1
- OSD x 1

Power Requirement

Power Input DC9~36V

LCD

Max. Resolution 1920x 1080

Size of the picture 16:9

MATRIX IPS

Contrast Ratio 1000 : 1

Max. Color 16.7 M

Luminance (cd/m2) 1000 nits

Response Time (Rising) 8 ms

Response Time (Fall) 8 ms

View Angle

- Horizontal Angle : 178 Degrees
- Vertical Angle: 178 Degrees

Touch Screen

Type P-cap USB

Mechanical

Construction Metal and Aluminum Bezel

IP Rating IP65 Front Side

Mounting Wall Mount , VESA Mount

Dimension TBC

Environment

Operating Temp -20~70 °C , IEC-60068-2-1/2/14

Storage Temp -20~70 °C

Humidity 10~90% @40 °C, non-condensing

Power Consumption 65W

EMC FCC / CE / UKCA Class A Certification

Vibration MIL-STD-810H, Method 514.8, Procedure I, 5~500Hz (Compliance)

Shock MIL-STD-810H, Method 516.8, Procedure I, 20g 11ms (Compliance)

Ordering Information

TDM-P215WTHAG-90L 21.5" P-cap touch Monitor, 1000 nits, AG coating, 8 ms response time (Either Rising or Fall), OSD on the front/ right side, with 3 Pin terminal block adapter

Web Link <https://www.elgens.com.tw/products/monitor/tdm-p215wthag-90l/>